


10/100/1000 Mbps Ethernet 2 port media converter
 1 Channel: Electrical ↔ SFP Optical

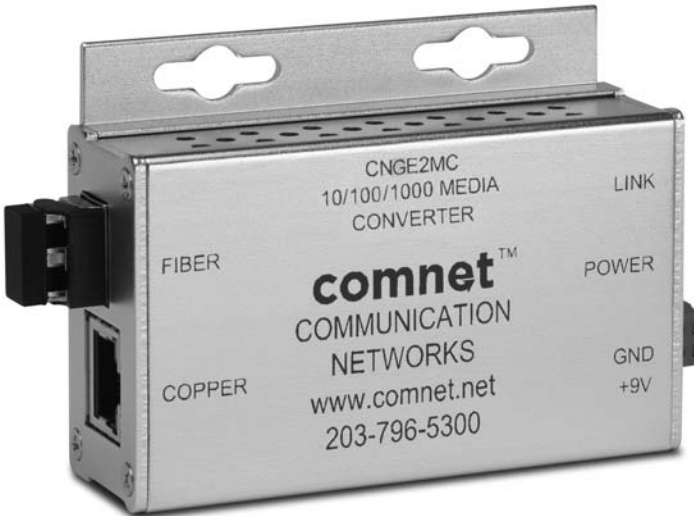

(SFP) = Small Form-Factor Pluggable Module

Description

The ComNet™ CNGE2MC-M small size Ethernet 2 port media converter is designed to transmit and receive 10/100/1000 Mbps data over optical fiber through user selectable SFP options. The CNGE2MC-M requires the ordering of sold-separately interchangeable SFP modules for fiber type, distance and connectors. The CNGE2MC-M electrical interface will Auto-Negotiate to a 10 Mbps, 100 or 1000 Mbps Ethernet rate without any adjustments. The optical interface operates at a 1000 Mbps Ethernet rate. The CNGE2MC-M is environmentally hardened to operate in extreme temperatures. LED indicators are provided for confirming equipment operating status. These units are stand-alone configuration only.

Applications

- 10/100/1000 Mbps Ethernet Media Converter
- High Speed Computer Links

PART NUMBER	DESCRIPTION
CNGE2MC-M	10/100/1000 Mbps Ethernet 2 port media converter

Features

- 10/100/1000 Mbps Ethernet
 - 10/100/1000 BASE-T/TX electrical port
 - 1000 BASE-FX optical port
- Electrical port supports Auto-Negotiation for 10 Mbps, 100 or 1000 Mbps, full duplex or half duplex data.
- Optical port supports 100 Mbps full duplex data
- Automatic MDI/MDI-X crossover
- Distances up to 60 km with optional SFPs
- Transparent to data encoding/compatible with major data protocols
- Designed to meet full compliance with the environmental requirements (ambient operating temperature, mechanical shock, vibration, humidity with condensation, high-line/low-line voltage conditions and transient voltage protection) of NEMA TS-1/TS-2 and the Caltrans Specification for Traffic Signal Control Equipment. (In Process)
- Uses interchangeable SFP for fiber type, distance and connector (Ordered separately)
- Voltage transient protection on all power and signal input/output lines provides unconditional protection from power surges and other voltage transient events.
- No in-field optical adjustments required
- LED Indicators
- IEEE 802.3 compliant
- Lifetime Warranty

specifications

DATA

Data Interface: Ethernet
Data Rate: 10/100/1000 Mbps
IEEE 802.3 Compliant
Full Duplex or Half Duplex Electrical Port/
Full Duplex Optical Port

FIBERS

1 or 2

FIBER CONNECTORS

Requires selection of sold-separately SFP modules. See ComNet data sheet for number and description of SFP modules

CONNECTORS

Power: Terminal Block
Electrical: RJ-45

LED INDICATORS*

- Optical Link/Data Activity
- Power

* LEDs: RED = "No Activity"
GRN = "Activity"
NOTE: RED DOES NOT MEAN "Error"

ELECTRICAL & MECHANICAL

Power: 8-27 VDC @ 220 mA
Surface Mount: N/A
Rack Mount: N/A
Number of Rack Slots: N/A
Current Protection: Automatic Resettable
Solid-State Current Limiters
Meets IPC Standard
Circuit Board: 3.3 x 2.5 x 1.1 in.,
Size (in./cm) (LxWxH) (8.4 x 6.4 x 2.8 cm)
Shipping Weight: <2 lbs./0.9 kg

ENVIRONMENTAL

MTBF: >100,000 hours
Operating Temp: -40° C to +75° C
Storage Temp: -40° C to +85° C
Relative Humidity: 0% to 95% (non-condensing)†


† May be extended to condensation conditions

AGENCY COMPLIANCE



PART NUMBER	DESCRIPTION
CNGE2MC-M	2 Port 10/100/1000 Mbps Ethernet Media Converter
Accessories	9 Volt DC Plug-in Power Supply, 90-264 VAC, 50/60 Hz (Included)
Options	Add suffix '/C' for Conformally Coated Circuit Boards (Extra charge, consult factory)

NOTE: This product requires a fiber installation with a minimum 30 dB connector return loss.
The use of Super Polish Connectors is recommended.
Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.

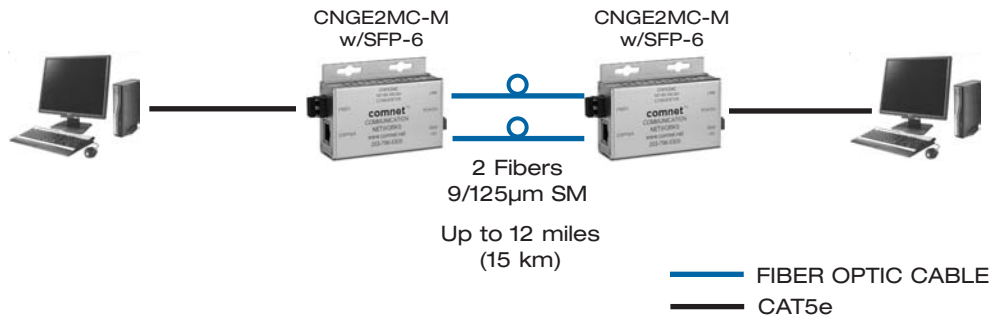

World Headquarters
3 Corporate Drive
Danbury, CT 06810
T: 203-796-5300
F: 203-796-5303
Tech Support: 1-888-678-9427
info@ComNet.net

ComNet Europe Ltd
8 Turnberry Park Road
Gildersome, Morley
Leeds, LS27 7LE, UK
T: +44 (0)113 307 6400
F: +44 (0)113 253 7462
info-europe@ComNet.net

